


AD-A150 623 EXAFS OF MONOLAYERS ON SILVER ELECTRODES 1984 PROGRESS 1/1
REPORT FOR SSRL PROPOSAL NUMBER 717M(U) IBM RESEARCH
LAB SAN JOSE CA D E REISNER ET AL. 08 JAN 85 TR-16
UNCLASSIFIED N00014-81-C-0776 F/G 7/4 NL

END

FILED

DTIC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD-A150 623

UNCLASIFIED COPY

Unclassified
SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

| REPORT DOCUMENTATION PAGE | | READ INSTRUCTIONS BEFORE COMPLETING FORM |
|---|-----------------------|---|
| 1. REPORT NUMBER 16 | 2. GOVT ACCESSION NO. | 3. RECIPIENT'S CATALOG NUMBER |
| 4. TITLE (and Subtitle) EXAFS OF MONOLAYERS ON SILVER ELECTRODES 1984 Progress Report for SSRL Proposal No. 717M | | 5. TYPE OF REPORT & PERIOD COVERED Technical Report 1-83 to 12-84 |
| | | 6. PERFORMING ORG. REPORT NUMBER |
| 7. AUTHOR(s) D. E. Reisner, O. R. Melroy, J. G. Gordon II, D. A. Buttry, G. L. Borges, L. Blum | | 8. CONTRACT OR GRANT NUMBER(s) N00014-81-C-0776 |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS IBM Research Laboratory 5600 Cottle Road San Jose, CA 95193 | | 10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS |
| 11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research 800 N. Quincy Street Arlington, VA 22217 | | 12. REPORT DATE January 8, 1985 |
| | | 13. NUMBER OF PAGES 3 |
| 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) | | 15. SECURITY CLASS. (of this report) Unclassified |
| | | 15a. DECLASSIFICATION, DOWNGRADING SCHEDULE |
| 16. DISTRIBUTION STATEMENT (of this Report) This document has been approved for public release and sale; its distribution is unlimited. | | |
| 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) | | |
| 18. SUPPLEMENTARY NOTES To be published in the 1984 SSRL Activity Report | | |
| 19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Surface EXAFS, fluorescence detection, silver electrode, lead underpotential deposition, synchrotron radiation. | | |
| 20. ABSTRACT (Continue on reverse side if necessary and identify by block number) During our latest run, November '83, at the Stanford Synchrotron Radiation Laboratory, we were able to detect x-ray fluorescence from a monolayer of Pb on single crystal silver film. The jump at the Pb edge represented increase in count rate of 150 cps on a 1500 cps background. This signal is too small for useful EXAFS to be extracted with a reasonable data collection time, but planned improvements in the electronic instrumentation and the experimental setup will achieve an edge jump greater than 1000 cps on a comparable background. <i>Originator furnished key words.</i> | | |

DTIC
ELECTE
FEB 26 1985
S E D

DD FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

OFFICE OF NAVAL RESEARCH

Contract N00014-81-C-0776

TECHNICAL REPORT NO. 16

EXAFS OF MONOLAYERS ON SILVER ELECTRODES
1984 Progress Report for SSRL Proposal No. 717M

by

D. E. Reisner, O. R. Melroy, J. G. Gordon II,
D. A. Buttry, G. L. Borges, L. Blum

Prepared for Publication

in

1984 SSRL Activity Report

IBM Research Laboratory
San Jose, California 95193

and

University of Puerto Rico
Rio Piedras, Puerto Rico 00931

| | |
|--------------------|--|
| Accession For | |
| NTIS GRA&I | <input checked="checked" type="checkbox"/> |
| DTIC TAB | <input type="checkbox"/> |
| Unannounced | <input type="checkbox"/> |
| Justification | |
| By | |
| Distribution/ | |
| Availability Codes | |
| Dist | Avail and/or Special |
| A-1 | |

January 8, 1984



Reproduction in whole or in part is permitted for
any purpose of the United States Government

This document has been approved for public release
and sale; its distribution is unlimited

RJ 4582 (49120) 1/28/85
Chemistry

EXAFS OF MONOLAYERS ON SILVER ELECTRODES
1984 Progress Report for SSRL proposal No 717M

D. E. Reisner, O. R. Melroy, J. G. Gordon, D. A. Buttry, G. L. Borges
IBM San Jose Research Laboratory
San Jose, California 95193

and

L. Blum
University of Puerto Rico
Rio Piedras, Puerto Rico 00931

Abstract:


During our latest run, November '83, at the Stanford Synchrotron Radiation Laboratory, we were able to detect x-ray fluorescence from a monolayer of Pb on single crystal silver film. The jump at the Pb edge represented increase in count rate of 150 cps on a 1500 cps background. This signal is too small for useful EXAFS to be extracted with a reasonable data collection time, but planned improvements in the electronic instrumentation and the experimental setup will achieve an edge jump greater than 1000 cps on a comparable background.

Our current knowledge of the electrochemical interface is derived primarily from thermodynamic and kinetic measurements coupled with theoretical treatments based on highly idealized models which describe only the diffuse double layer, or space charge region, within 20-100 Å of the electrode surface. These types of measurements do not yield unambiguous information about the structure of the interface at the atomic or molecular level. This situation is not attributable to lack of interest but rather to the lack of structure sensitive techniques which can be used in solution.

Surface EXAFS is potentially such a technique since X-rays are able to penetrate condensed matter. Utilizing the intense radiation available from a synchrotron and fluorescence detection, it should be possible to observe EXAFS of a monolayer of atoms at a metal:liquid interface, without having to remove the electrode from solution.

As a demonstration experiment, we have chosen to study a monatomic layer of lead, prepared by electrochemical underpotential deposition (UPD), on silver. Electrochemical deposition of lead on silver occurs in stages. The first monolayer is deposited at a potential which is less negative (by several hundred mV - the underpotential) than the expected thermodynamic deposition potential and the lead coverage remains constant at one monolayer over a relatively wide potential range.

During our last run, November '83, we were able to detect fluorescence from a monolayer of Pb on single crystal silver film, but at a signal level too weak to permit meaningful analysis. The observed spectrum, normalized to incident x-ray flux is displayed in the Figure. This spectrum is a composite of 15 scans of 30 min duration each (45 sec/point). The edge jump corresponds to an increase in count rate of 150 cps on a 1500 cps background.

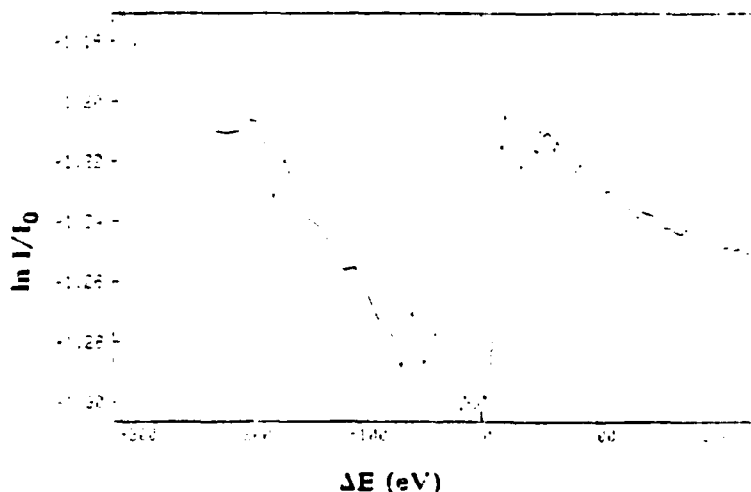

The substrate was a free standing 2 μm Ag(111) film prepared by epitaxial deposition on mica. The fluorescence data was collected using a 2" diameter NaI(Tl) scintillator preceded by an Se filter and Soller slits, and operated with a very narrow discriminator window. Despite its poor energy resolution, its large active area and high count rate

capability provided a better S/N than a smaller HPGe detector whose throughput was limited by the detection electronics (the total count rate, pre-discriminator, was > 100 Kcps).

Measurements made with the energy dispersive HPGe detector verified that the major contributions to background were elastic and Compton scatter from the substrate followed by impurity fluorescence and Se fluorescence from the filter. Planned improvements in the electronic instrumentation and the experimental setup, we believe, will achieve an edge jump of > 1000 cps on a comparable background.

This work was supported in part by the Office of Naval Research.

END

FILMED

3-85

DTIC